


Current Sense Resistors Selection Guide

KOA offers complete family of Current Sense Resistors capable of sensing large to small currents with ultra-low resistance


Applications: Current management sensor including charge/discharge of secondary batteries • Current control sensor of motors and DC/DC converters • Circuit protecting sensor by overcurrent detection

Current Sense Resistors

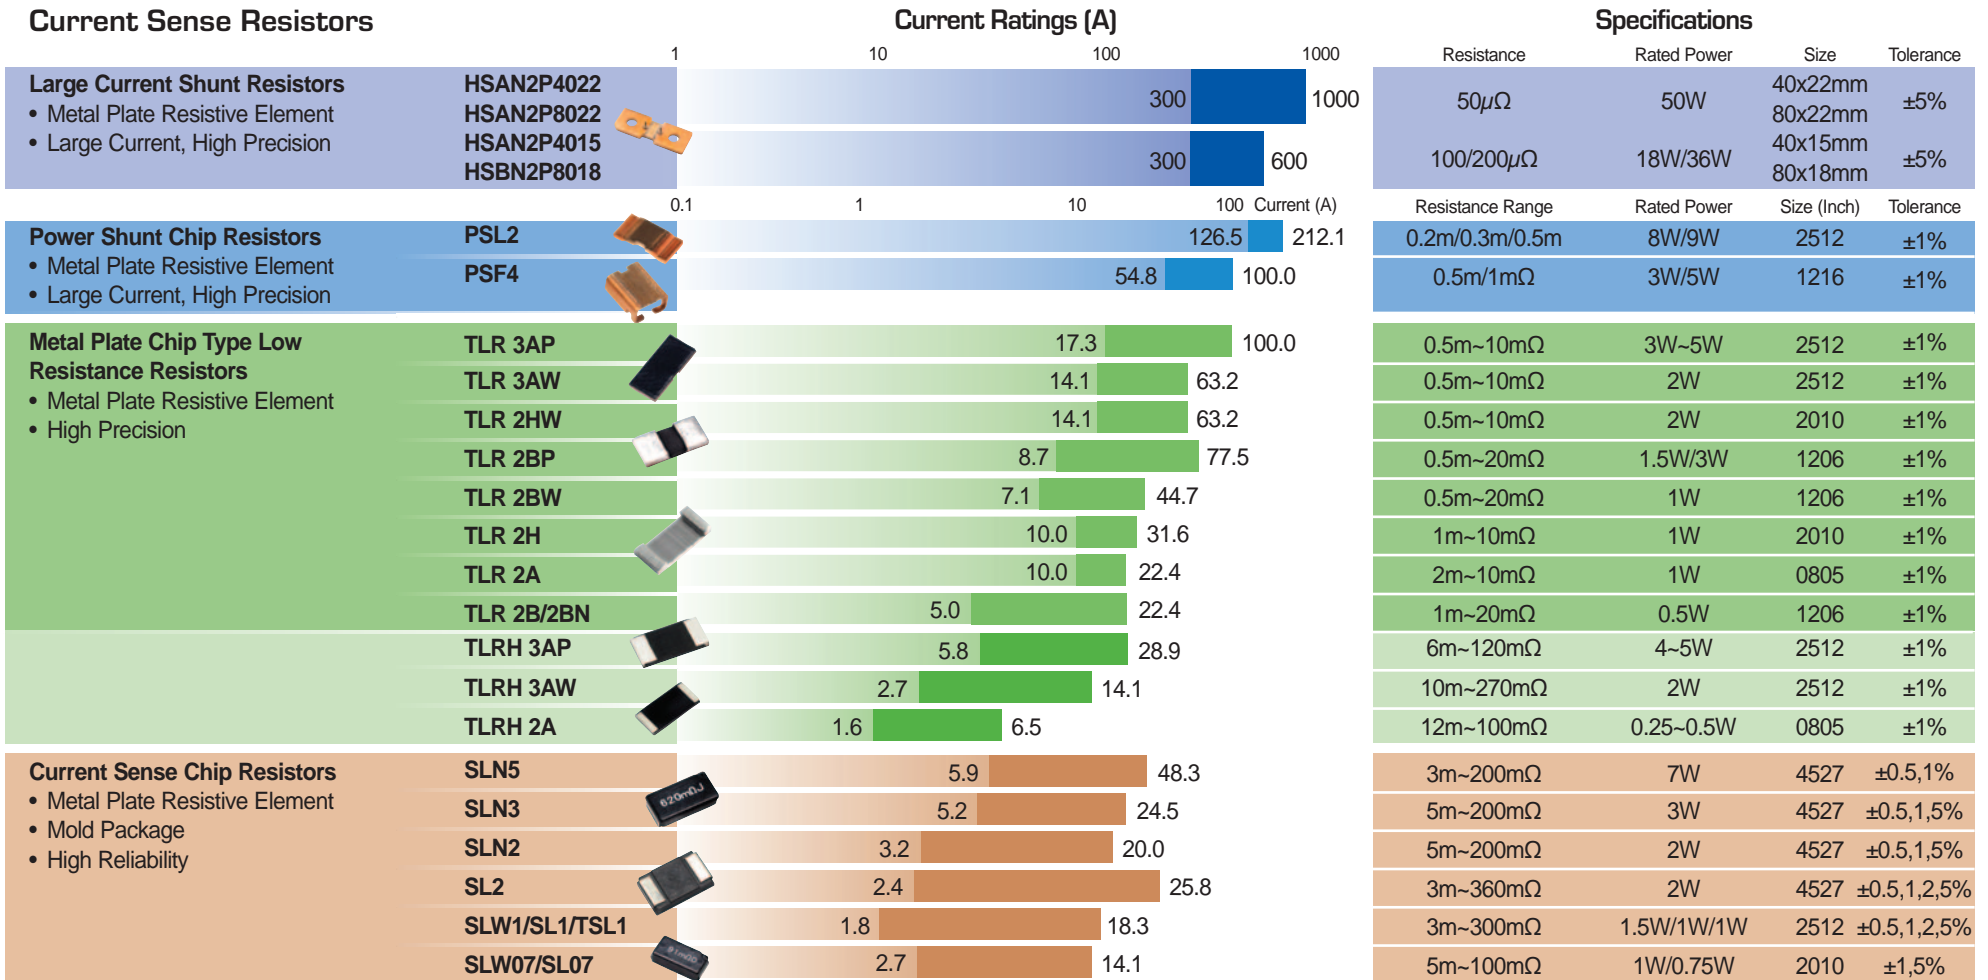

Current Sense Resistors Selection Guide

Current Sense Resistors

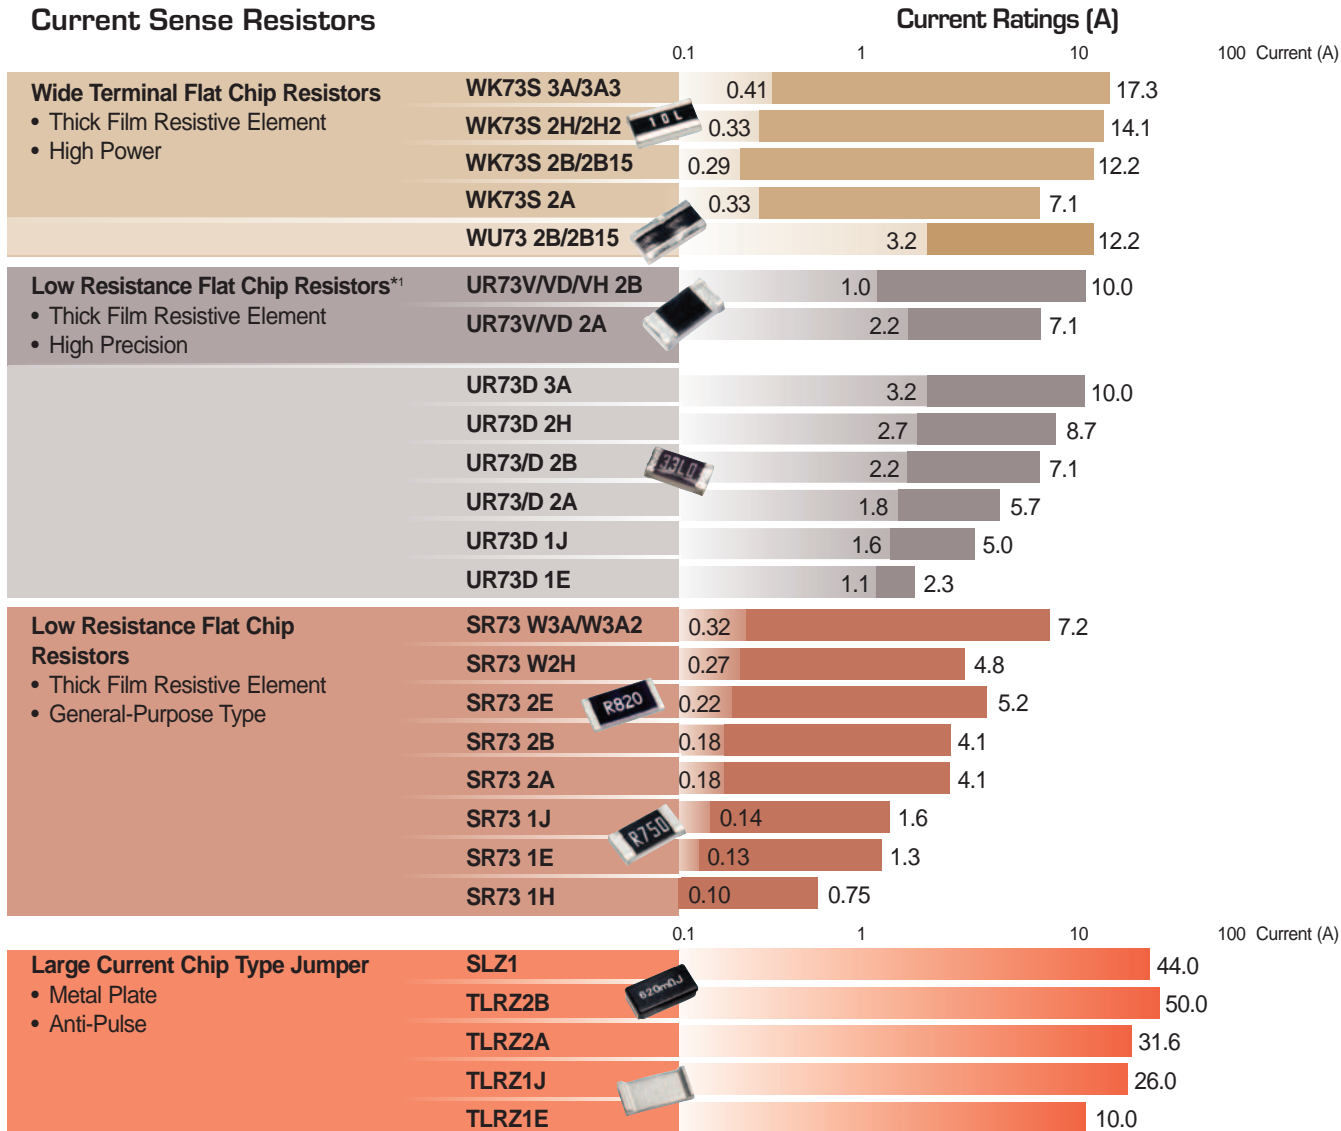

Specifications			
Resistance Range	Rated Power	Size (Inch)	Tolerance
10m~9.76Ω	1.5~2W/3W	1225	±1,5%
10m~9.76Ω	1W/2W	1020	±1,5%
10m~9.76Ω	0.75~1W/1.5W	0612	±0.5,1,5%
20m~9.76Ω	1W	0508	±1,5%
10m~100mΩ	1W/1.5W	0612	±1%
10m~1Ω	0.5~1W	1206	±1%
10m~100mΩ	0.5W	0805	±1%
10m~100mΩ	1W	2512	±1%
10m~100mΩ	0.75W	2010	±1%
10m~100mΩ	0.5W	1206	±1%
10m~100mΩ	0.33W	0805	±1%
10m~100mΩ	0.25W	0603	±1%
24m~100mΩ	0.125W	0402	±1%
39m~10Ω	1W/2W	2512	±1,2,5%
33m~10Ω	0.75W	2010	±1,2,5%
24m~10Ω	0.5~0.66W	1210	±1,2,5%
30m~10Ω	0.33~0.5W	1206	±0.5,1,2,5%
30m~10Ω	0.33~0.5W	0805	±0.5,1,2,5%
100m~10Ω	0.2~0.25W	0603	±1,2,5%
100m~10Ω	0.166W	0402	±1,2,5%
180m~10Ω	0.1W	0201	±1,5%
Resistance Range	Rated Current	Size (Inch)	
Max. 0.5mΩ	44A	2512	
Max. 0.2mΩ	50A	1206	
Max. 0.2mΩ	31.6A	0805	
Max. 0.2mΩ	26A	0603	
Max. 0.5mΩ	10A	0402	

• This selection guide plots the current value calculated from (Power rating÷upper or lower limit of resistance). Please build the design considering heat dissipation.
 • This is the guideline to select products by current value. Please confirm product specification for actual design and selecting products and use the products based on the precautions to use.
 • Please confirm our catalog or delivery specification for the details of each product.
 *1 UR73/UR73D is only applied for car accessories as automotive use. Please ask us for details.