




features

- Suitable to detect large current due to ultra low resistances
- Flame retardant resistor in a ceramic case
- All custom-made products
- Automatic mounting is available
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

dimensions and construction

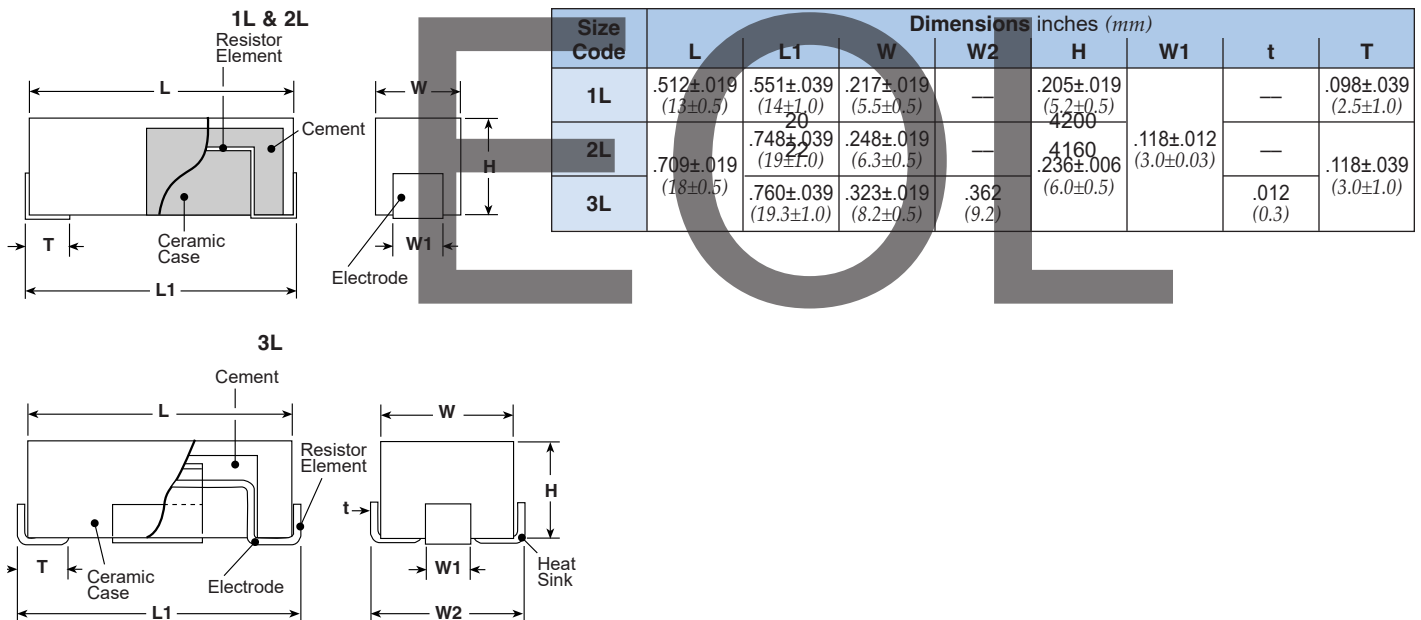

ordering information

BLR	1L	N	TE	50L	J
Type	Power Rating	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance
	1L: 1W 2L: 2W 3L: 15W	N: No surface treatment	TE: 7" embossed plastic 1, 2: 1,000 pieces/reel 3: 750 pieces/reel	3 digits All values less than 0.1Ω (100mΩ) are expressed in mΩ with "L" as decimal Ex: 2mΩ = 2L0	J: ±5% K: ±10%

For further information on packaging, please refer to Appendix A.

applications and ratings


Part Designation	Power Rating	T.C.R. (ppm/°C) Max.	Resistance Range*	Resistance Tolerance	Rated Ambient Temperature	Operating Temperature Range
BLR1L	1W	±200	25m, 50mΩ	J: ±5% K: ±10%	+70°C	-40°C to +180°C
BLR2L	2W		8m, 12m, 13m, 16m, 17.5m, 20m, 22m, 25mΩ			
BLR3L	15W**					

* Please consult with us in advance about resistance value for custom-made products

** It is assumed to be used on aluminum circuit board

environmental applications

Derating Curve

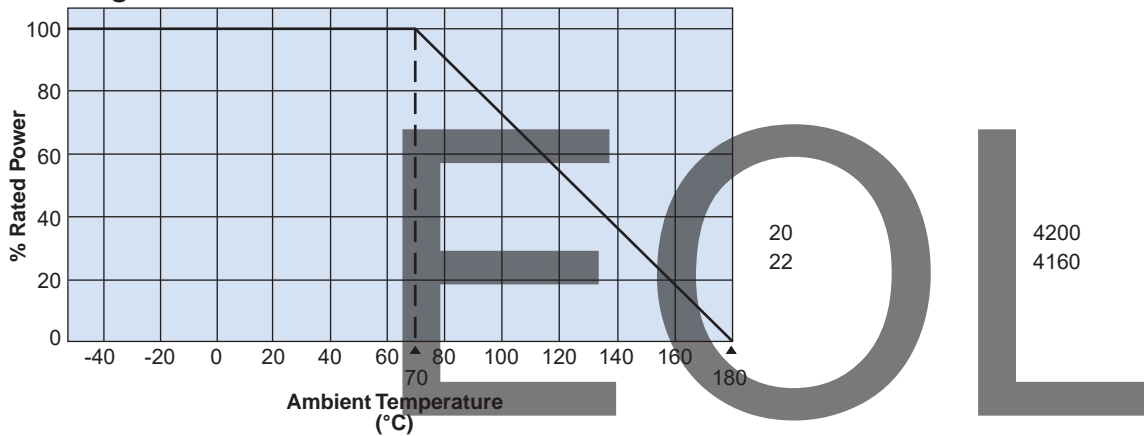

Performance Characteristics

Parameter	Requirement ~ R ±(%+0.05Ω)		Test Method
	Limit	Typical	
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified value	—	+25°C/+125°C
Cold Resistance	±5.0%	±2.0%	-55°C, 1000 hours
Heat Resistance	±5.0%	±2.0%	+125°C, 1000 hours
Moisture Resistance	±5.0%	±2.0%	40°C ± 2°C, Power rating x 1/10, 90% - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Load Life	±5.0%	±2.0%	70°C ± 2°C, 1000 hours 1.5 hr ON, 0.5 hr OFF cycle