


features

- Virtually eliminates channel capacitance, a primary cause of reduced system performance
- Eases routing design of DDR SDRAM termination
- High precision $\pm 1\%$ is standard
- Saves board space and high density mounting
- Products with lead-free terminations meet EU RoHS requirements. EU RoHS regulation is not intended for Pb-glass contained in electrode, resistor element and glass.




dimensions and construction

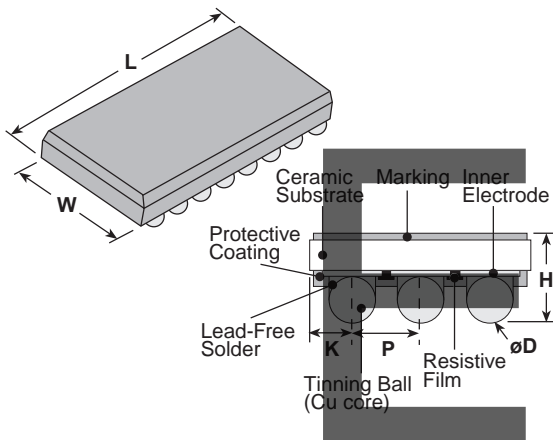

Size Code	Dimensions inches (mm)						Coplanarity
	P	øD	K	H	L	W	
BR27A	.039±.010 (1.0±0.25)	.026±.002 (0.67±0.05)	.020±.010 (0.50±0.25)	.045±.006 (1.15±0.15)	.354±.006 (9.0±0.15)	.118±.006 (3.0±0.15)	.006 Max. (0.15 Max.)
BR36S	.039±.010 (1.0±0.25)	.026±.002 (0.67±0.05)	.020±.010 (0.50±0.25)	.045±.006 (1.15±0.15)	.087 Max. (9.0±0.15)	.157±.006 (4.0±0.15)	

circuit schematic

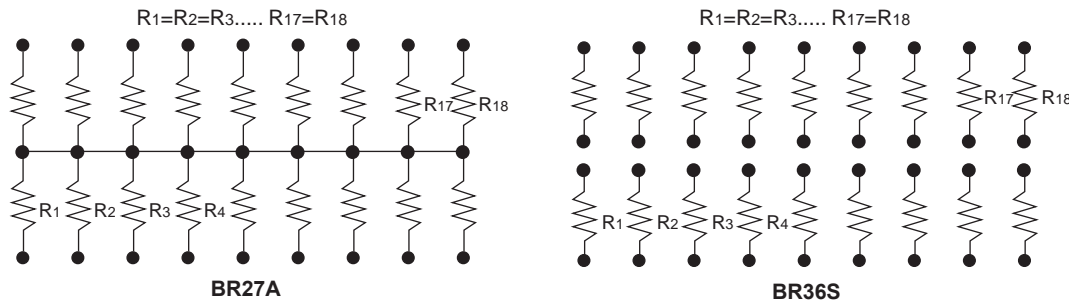

ordering information

BR	27	A	P	T	TEB	1001	F
Type	Number of Terminals 27: 27 Terminal 36: 36 Terminal	Circuit Symbol A: Parallel network S: Separate	Terminal Pitch P: 1 mm	Termination Material T: Sn	Packaging TEB: 8 mm pitch embossed plastic	Nominal Resistance $\pm 1\%$: 3 significant figures + multiplier "R" indicates decimal on values <100Ω	Resistance Tolerance F: $\pm 1\%$

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.


11/14/17

applications and ratings

Part Designation	Number of Terminals	Circuit Symbol	Power Rating	Resistance Range (Ω) E-24 F: $\pm 1\%$	T.C.R. (ppm/ $^{\circ}\text{C}$)	Maximum Working Voltage	Maximum Overload Voltage	Rated Ambient Temperature	Operating Temperature Range
BR	27	A	0.05W/element 1W/package	10-1K	± 200	25V	50V	+70 $^{\circ}\text{C}$	-55 $^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$
	36	S							

environmental applications

Derating Curve

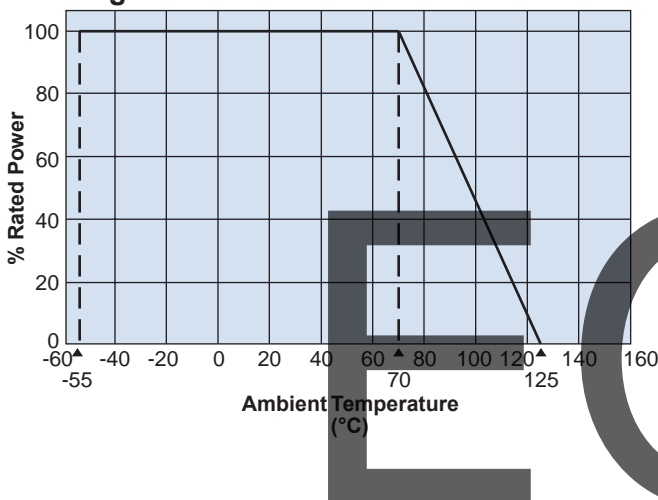

Performance Characteristics

Parameter	Maximum $\Delta R \pm(\%+0.05\Omega)$	Test Method
Resistance	1% within specified tolerance	25 $^{\circ}\text{C}$
T.C.R.	Within specified T.C.R.	-55 $^{\circ}\text{C}$ /+125 $^{\circ}\text{C}$
Short Time Overload	$\pm 0.5\%$	Rated voltage times 2.5 for 5 seconds
Resistance to Soldering Heat	$\pm 0.5\%$	250 $^{\circ}\text{C} \pm 5^{\circ}\text{C}$, 30 seconds, 3 times
Rapid Change of Temperature	$\pm 0.5\%$	-65 $^{\circ}\text{C}$ (30 min.)/+125 $^{\circ}\text{C}$ (30 min.) 5 cycles
Moisture Resistance	1.0%	0.1 Rated load, 85 $^{\circ}\text{C}$, 85% RH, 1000 hours
Endurance at 70 $^{\circ}\text{C}$	1.0%	70 $^{\circ}\text{C}$, full load 2000h 1.5h ON/0.5h OFF cycle
Low Temperature Storage	0.5%	-65 $^{\circ}\text{C}$, 24h, no load
High Temperature Exposure	1.0%	125 $^{\circ}\text{C}$, 1000h, no load