

A Complete Family of Wide Side Termination Resistors

Technical Information

- Wide side termination (reverse geometry)
- Higher power ratings as a result of enhanced heat dissipation
- Superior thermal shock characteristics and high solder joint reliability
- Allows downsizing and increased board space due to higher power rating density
- High reliability and performance with T.C.R. down to ± 75 p.p.m. and 0.5% resistance tolerance
- AEC-Q200 Qualified

Target Markets

- Power supply market – for current sense detection
- Automotive – ECU's, anti-lock braking systems, air bag systems

KOA Speer Wide Terminal Lineup

Standard
WK73R

Pulse Power
WG73

Low Resistance
WK73S
WU73

Anti-Sulfur
WK73R-RT
WK73S-RT


Thin Film
WN73H



Why Choose Wide Terminal Resistors?

- Offers excellent heat radiation and achieves higher rated power for similar dimensions
- Wide terminal resistors, feature closely-spaced electrodes and better heat dissipation and heat-cycle durability as compared to standard resistor

Heat Shock Test

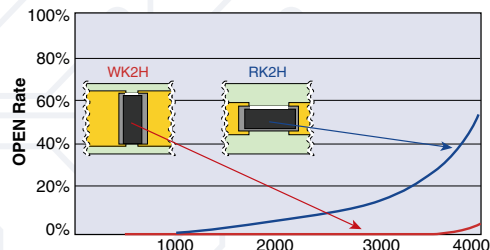



Chip Size and Power Rating



Wide Terminal Type (WK73)
Heat Dissipation Image



Nominal Terminal Type (RK73)
Heat Dissipation Image



Applications & Ratings

Standard

WK73R: High reliability

Part Designation	Power Rating ¹	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temp. Range
					D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73R1E (0204)	0.33W	70°C	125°C	±100	—	10 -1M	10 - 1M	75V	100V	-55°C to +155°C
WK73R1J (0306)	0.5W	70°C	125°C	±100	—	10k -1M	10k -1M	150V	200V	
	0.66W					10 - 9.76k	10 - 9.1k			
WK73R2A (0508)	0.75W	70°C	125°C	±100	20.5k - 1M	20.5k - 1M	22k-1M	200V	400V	
	1W		125°C	±100	10 - 20k	10 - 20k	10 - 20k			
WK73R2B (0612)	0.75W	70°C	125°C	±100	10k - 1M	10k - 1M	10k - 1M	200V	400V	
	1.5W		125°C	±100	10 - 9.76k	10 - 9.76k	10 - 9.1k			
WK73R2H (1020)	2W	70°C	125°C	±100	—	10 - 430k	10 - 430k	200V	400V	
				±200	—	432k - 1M	470k - 1M			
WK73R3A (1225)	3W	70°C	125°C	±100	—	10 - 330k	10 - 330k	200V	400V	
				±200	—	332k - 1M	360k - 1M			

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower

¹ If the terminal part temperature exceeds the rated terminal part temperature, even if it is below the rated ambient temperature, apply the derating curve for the terminal part temperature.

Pulse Power

WG73: Flat chip resistors (anti-surge)

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)		Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					K±10% E-12	M±20% E-12			
WG732B (0612)	1W	70°C	±125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C
WG732H (1020)	1.5W	70°C	±125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C
WG733A (1225)	2W	70°C	±125°C	±100	560m ~ 1k	560m ~ 1k	200V	400V	-55°C to +155°C

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower.

If any questions arise whether to use the “Rated Ambient Temperature” or the “Rated Part Temperature” in your usage conditions, please give priority to the “Rated Terminal Part Temperature.”

If any questions arise whether to use the “Rated Ambient Temperature” or the “Rated Terminal Part Temperature”, please give priority to the “Rated Terminal Part Temperature.” For more details on derating click here [“Derating Curves – Caution & Terms.”](#)

Applications & Ratings

Low Resistance

Thick Film

WK73S: Resistance range of 10m to 9.76Ω

Part Designation	Power Rating ¹	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)			Operating Temp. Range
					D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24	
WK73S2A (0508)	1.25W	70°C	125°C	±100	—	1 - 9.76	1 - 9.1	-55°C to +155°C
				0~+200	—	30m - 976m	30m - 910m	
				0~+300	—	20m - 29.4m	20m - 27m	
WK73S2B (0612)	1.5W	70°C	125°C	±100	430m - 9.76	430m - 9.76	430m - 9.1	
				±200	—	30m - 422m	30m - 390m	
				±800	—	—	10m - 27m	
WK73S2H (1020)	3W	70°C	125°C	±100	—	220m - 9.76	220m - 9.1	
				±200	—	27m - 215m	27m - 200m	
				±800	—	—	10m - 24m	
WK73S3A (1225)	4W	70°C	125°C	±100	—	360m - 9.76	360m - 9.1	
				±200	—	33m - 357m	33m - 330m	
				±300	—	22m - 32.4m	22m - 30m	
				±800	—	—	10m - 20m	

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$

¹ If the terminal part temperature exceeds the rated terminal part temperature, even if it is below the rated ambient temperature, apply the derating curve for the terminal part temperature.

Thick Film Current Sense

WU73: Resistance range of 10m to 100mΩ

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω) E-24, 25m, 50m*1	Resistance Tolerance	Operating Temperature Range
WU732B (0612)	1W	70°C	115°C	±100	10m~12m	F: ±1%	-55°C to +155°C
				±75	13m~27m		
				±100	30m~100m		
WU732B15 (0612)	1.5W ²	70°C	95°C	±100	10m~12m	F: ±1%	-55°C to +155°C
				±75	13m~27m		
				±100	30m~100m		

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower.

*1 25mΩ and 50mΩ are available.

*2 If you use at the rated power, please keep the condition that the terminal of the resistor is below the rated terminal part temperature. Please refer to the derating curves based on the terminal temperature.

If any questions arise whether to use the "Rated Ambient Temperature" or the "Rated Terminal Part Temperature", please give priority to the "Rated Terminal Part Temperature." For more details on derating click here ["Derating Curves – Caution & Terms."](#)

Applications & Ratings

Anti-Sulfur

WK73R-RT/WK73S-RT: Power rating of 0.75 to 4 Watt

Part Designation	Power Rating ¹	Rated Ambient Temperature	Rated Terminal Part Temperature	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω)			Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					D±0.5% E-24/E-96	F±1% E-24/E-96	J±5% E-24			
WK73S2A (0508)	1.25W	70°C	125°C	±100	—	1 ~ 9.76	1 ~ 9.1	200V	400V	-55°C to +155°C
WK73R2A (0508)	0.75W	70°C	125°C	±100	20.5k ~ 1M	20.5k ~ 1M	22k ~ 1M			
	1W			±100	10 ~ 20k	10 ~ 20k				
WK73S2B (0612)	1.5W	70°C	125°C	±100	—	1 ~ 9.76	1 ~ 9.1			
				±150	—	0.3 ~ 0.976	0.3 ~ 0.91			
WK73R2B (0612)	0.75W	70°C	125°C	±200	—	10k ~ 1M	10k ~ 1M			
	1.5W			±100	—	10 ~ 9.76k	10 ~ 9.1k			
WK73S2H (1020)	3W	70°C	125°C	±100	—	1 ~ 9.76	1 ~ 9.1	200V	400V	
WK73R2H (1020)	2W	70°C	125°C	±200	—	0.2 ~ 0.976	0.2 ~ 0.91			
				±100	—	10 ~ 430k	10 ~ 430k			
WK73S3A (1225)	4W	70°C	125°C	±200	—	432k - 1M	470k - 1M			
				±100	—	1 ~ 9.76	1 ~ 9.1			
WK73R3A (1225)	3W	70°C	125°C	±100	—	10 ~ 330k	10 ~ 330k	200V	400V	
				±200	—	332k - 1M	360k - 1M			

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower.

¹ When using Power Rating, please use the derating curves based on the terminal part temperature.

Thin Film

WN73H: Thin Film

Part Designation	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (X 10 ⁻⁶ /K)	Resistance Range (Ω) E24 · E96			Maximum Working Voltage	Maximum Overload Voltage	Operating Temperature Range
					B: ±0.1%	C: ±0.25%	D: ±0.5%			
1J (0306)	0.3W	85°C	±125°C	±10	100 ~ 43k	100 ~ 43k	100 ~ 43k	75V	150V	-55°C to +155°C
				±25	15 ~ 100k	15 ~ 100k	10 ~ 100k			
				±50	15 ~ 100k	15 ~ 100k	10 ~ 100k			
2B (0612)	1W	85°C	±125°C	±10	100 ~ 100k	100 ~ 100k	100 ~ 100k	100V	200V	-55°C to +155°C
				±25	15 ~ 100k	15 ~ 100k	15 ~ 100k			
				±50	15 ~ 100k	15 ~ 100k	15 ~ 100k			

Rated voltage = $\sqrt{\text{Power rating} \times \text{resistance value}}$ or max. working voltage, whichever is lower.

If any questions arise whether to use the “Rated Ambient Temperature” or the “Rated Terminal Part Temperature”, please give priority to the “Rated Terminal Part Temperature.” For more details on derating click here [“Derating Curves – Caution & Terms.”](#)